



Advanced Card Systems Ltd.
Card & Reader Technologies

ACR900 Handheld EMV Terminal



Technical Specifications V1.01



Table of Contents

1.0.	Introduction	3
2.0.	Features	4
3.0.	Supported Card Types	6
3.1.	MCU Cards	6
3.2.	Contactless Cards	6
3.3.	Magnetic Stripe Cards	6
4.0.	Typical Applications.....	7
5.0.	Technical Specifications.....	8



1.0. Introduction

The ACR900 uses a 32-bit secure MCU core and is designed for transactions using payment cards. It offers high performance features that support complex applications and provides a large memory to maximize data storage.

The ACR900 provides connectivity options to support online functionalities. It is capable of communicating online with a back-end server via TCP/IP and WiFi. Furthermore, the ACR900 also provides mobile connectivity option via GPRS and WCDMA, which will enable the device to connect to the bank's back-end server. It is also compact and portable enough to be used as a handheld terminal.

A built-in thermal printer is added to its design to print receipts on hand. Aside from e-banking and e-payment, the device may also be used for e-purse, e-government, healthcare, and transportation applications. Its payment security is assured through its compliance with international payment standards.





2.0. Features

- 32-bit Secure Processor running Embedded Secure Linux®
- 512 MB Flash and 256 MB RAM
- Expandable Micro SD Card support with memory from 1 GB up to 32 GB
- Connectivity Support
 - Wi-Fi
 - GPRS/GSM quad band (850 MHz, 900 MHz, 1800 MHz, 1900 MHz)
 - 3G connectivity support (900 MHz/2100 MHz or 850 MHz/1900 MHz)
 - Ethernet (Optional)
- Contact Interface:
 - One Full-sized Contact Card Slot (Landing Connector)
 - Supports ISO 7816 Class A, B, and C (5 V, 3 V and 1.8 V) cards
 - Supports microprocessor cards with T=0 or T=1 protocol
 - Supports memory cards
 - Supports extended APDU
- Contactless Interface:
 - Integrated Contactless Smart Card Interface
 - Read/Write speed of up to 424 Kbps
 - Supports ISO 14443 Part 1-4 Type A and B cards, MIFARE Classic®, MIFARE® DESFire®
 - Supports ISO 18092, FeliCa
 - Built-in antenna for contactless tag access, with card reading distance of up to 50 mm (depending on tag type)
 - Built-in anti-collision feature (only one tag is accessed at any time)
 - Supports extended APDU (max. 64 KB)
- SAM Interface:
 - Four SAM-sized Card Slots (Contact Connector)
 - Supports ISO 7816 Class A, B, and C (5 V, 3 V and 1.8 V) cards
- SIM Interface:
 - One SIM-sized Card Slot for GPRS/3G
- Magnetic Stripe Card Support
- Built-in-Peripherals
 - 2.8-inch Easy-to-Read, High Resolution Colored LCD
 - Highly Durable 22-button Keypad
 - Thermal Printer
 - Real-time Clock (RTC) with independent backup battery
 - 4 LED Status Indicators (Blue, Yellow, Green and Red)
 - Built-in Speaker
- Compliant with the following standards:
 - ISO 7816



- ISO 14443
- ISO 7811
- EMV® Contact Levels 1 and 2
- EMV® Contactless Levels 1 and 2
- MasterCard® PayPass™
- Visa payWave®
- CE
- FCC
- RoHS 2



3.0. Supported Card Types

3.1. MCU Cards

The ACR900 operates with MCU cards that follow:

- T=0 or T=1 protocol
- ISO 7816-compliant Class A, B, C (5 V, 3 V, 1.8 V)

3.2. Contactless Cards

The ACR900 supports the following contactless cards:

- ISO 14443-compliant, Type A and B Standard, Parts 1 to 4
- T=CL protocol
- MIFARE Classic®
- MIFARE Ultralight®
- MIFARE® DESFire®
- MIFARE Plus®
- FeliCa

3.3. Magnetic Stripe Cards

The ACR900 supports the following magnetic stripe cards:

- ISO 7811 Tracks 1, 2 and 3
- Bi-directional




4.0. Typical Applications

- Banking and Payment
- Transportation
- e-Purse
- e-Government
- Healthcare



5.0. Technical Specifications

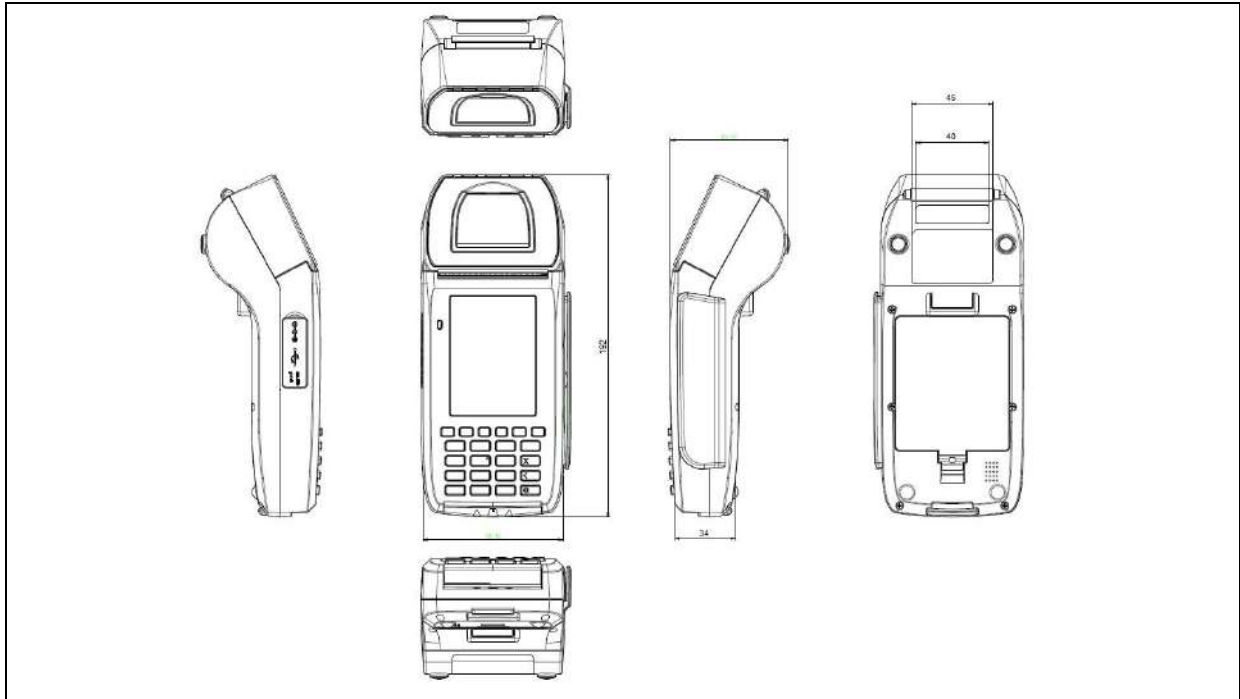

Physical Characteristics

Dimensions 192.0 mm (L) x 83.0 mm (W) x 68.0 mm (H)
Weight 481.0g (with battery)
Case Color Black

Processor

32-bit 384MHz Secure Processor

Operating System

Embedded Secure Linux®

Power

Power Source External Power Adapter
Battery Lithium Ion, 7.4 V, 2000 mAh

Memory

Flash 512 MB
RAM 256 MB
Micro SD Memory Card Size Up to 32 GB

Connectivity

Ethernet (Optional) Built-in 10/100-base-T
Wi-Fi IEEE 802.11 b/g/n
Quad-band GSM/GPRS 850MHz/900MHz/1800MHz/1900MHz
WCDMA 900MHz/2100MHz or 850MHz/1900MHz

Contact Smart Card Interface

Standard ISO 7816 Class A, B, C (5 V, 3 V, 1.8 V), T=0 and T=1
Number of Slots One (1) Full Sized
Supply Current Max. 50 mA
Short Circuit Protection +5 V/GND on all pins
Card Insertion Cycles Min. 100,000

Contactless Smart Card Interface

Standard ISO 14443 A and B, MIFARE®, FeliCa
Protocol ISO14443, ISO18092, T=CL protocol
Operating Frequency 13.56 MHz
Operating Distance Up to 40 mm

Magnetic Stripe Card

Standard ISO 7811, Track 1/2/3, Bi-directional



SAM Card Interface

Card Connector Type..... Contact
 Standard ISO/IEC 7816
 Number of slots Four (4) SAM Slots
 Card Size Standard (or 2FF, 2nd Form Factor), ISO/IEC 7810:2003 ID-000,
 25.0 mm x 15.0mm

SIM Card Interface

Standard GSM11.11
 Number of slots One (1) Standard SIM-sized
 Card Size Standard (or 2FF, 2nd Form Factor), ISO/IEC 7810:2003 ID-000,
 25.0 mm x 15.0 mm

Built-in Peripherals

Keypad 22 keys
 LCD Display 2.8 inch, 240 x RGB x 320 Full Color TFT LCD
 Audio Speaker..... 20 Hz – 20 KHz
 LED Status Indicators 4 LEDs (Blue, Yellow, Green and Red)

Printer

Printer Type Thermal
 Number of Dot/Line 384
 Resolution 203 DPI
 Print Width 48 mm
 Max Speed 85 mm/sec
 Paper Width 57 mm
 Max. Paper Roll Diameter 40 mm

Operating Conditions

Temperature..... 0°C – 50°C
 Humidity Max. 90% (non-condensing)

Certifications/Compliance

ISO 7816, ISO 14443, ISO 7811, EMV® Contact Levels 1 and 2, EMV® Contactless Levels 1 and 2, MasterCard® PayPass™, Visa payWave®, Apple Pay® ready, CE, FCC, RoHS 2



EMV is a registered trademark or trademark of EMVCo LLC in the United States and other countries.
 Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.
 MasterCard is a registered trademark and PayPass is a trademark of MasterCard International Incorporated.
 MIFARE and MIFARE Classic are trademarks of NXP B.V.
 VISA payWave is a registered trademark of Visa International Service Association.